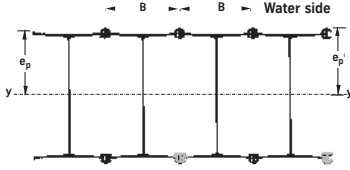
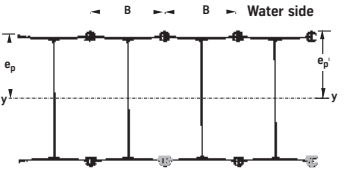



# PEINE Composite Wall System

Selection from the complete range	Section	Width	Weight	Cross section	Second moment of inertia	Section modulus		Coating area
Combination C 23	PSp	B m	kg/m <sup>2</sup>	cm <sup>2</sup> /m	I <sub>y</sub> cm <sup>4</sup> /m	W <sub>y</sub> cm <sup>3</sup> /m	W <sub>y</sub> <sup>1</sup> cm <sup>3</sup> /m	Water side m <sup>2</sup> /m
	370	0.398	376	478	137550	7000	5880	1.11
	400	0.398	389	495	163270	7700	6550	1.11
	500	0.398	411	523	262250	9930	8690	1.11
	600	0.478	451	574	398380	12730	11370	1.11
	606	0.478	485	617	438080	13910	12540	1.11
	700	0.478	474	603	556420	15280	13850	1.11
	706	0.478	508	647	610370	16660	15230	1.11
	800	0.478	519	661	786680	18960	17390	1.11
	806	0.478	554	705	857040	20550	18990	1.11
	900	0.478	542	691	1018230	21850	20220	1.11
	906	0.478	577	734	1107200	23650	22030	1.11

Selection from the complete range	Section	Width	Weight	Cross section	Second moment of inertia	Section modulus		Coating area
Combination C 23	PSp	B m	kg/m <sup>2</sup>	cm <sup>2</sup> /m	I <sub>y</sub> cm <sup>4</sup> /m	W <sub>y</sub> cm <sup>3</sup> /m	W <sub>y</sub> <sup>1</sup> cm <sup>3</sup> /m	Water side m <sup>2</sup> /m
	1000	0.478	565	720	1284310	23160	24840	1.11
	1006	0.478	599	764	1394060	25180	26860	1.11
	1001	0.478	616	785	1431170	25870	27750	1.11
	1013	0.478	638	812	1500180	27150	29010	1.11
	1016	0.478	650	828	1540900	27900	29760	1.11
	1016 S	0.478	685	872	1653800	29980	31800	1.11
	1017	0.478	714	910	1751940	31620	33560	1.19
	1030	0.478	791	1008	1898470	33780	35990	1.19
	1035 S	0.478	820	1045	1994450	35810	37670	1.19

The colored interlocks serve as guide interlocks and are not fitted over the entire length.

Combination C 23

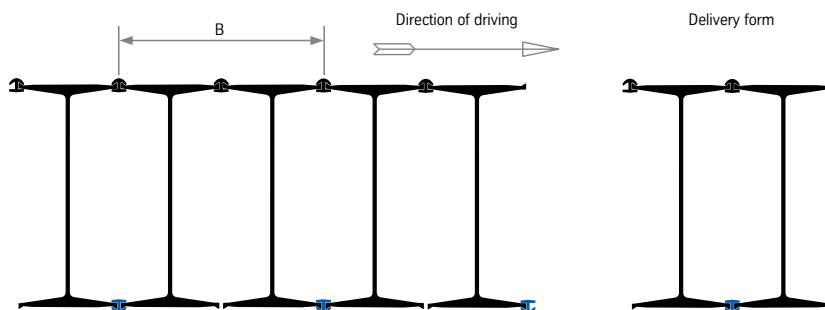

The length of the guide interlocks is about 500 mm and depends on the soil and driving conditions.