



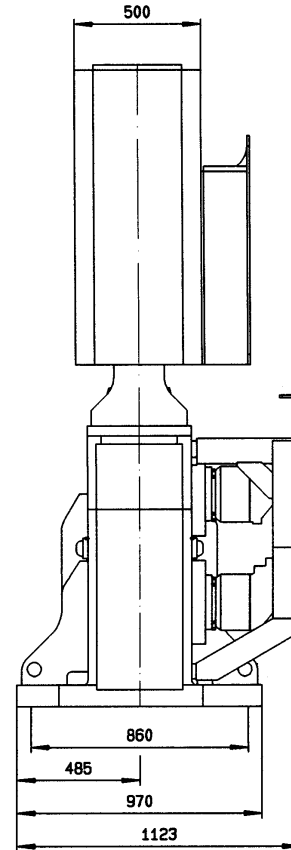

Müller-Vibrator MS-62 HV	TA 1037 Dat.: 29.09.2004 Name: Riehl
---	---

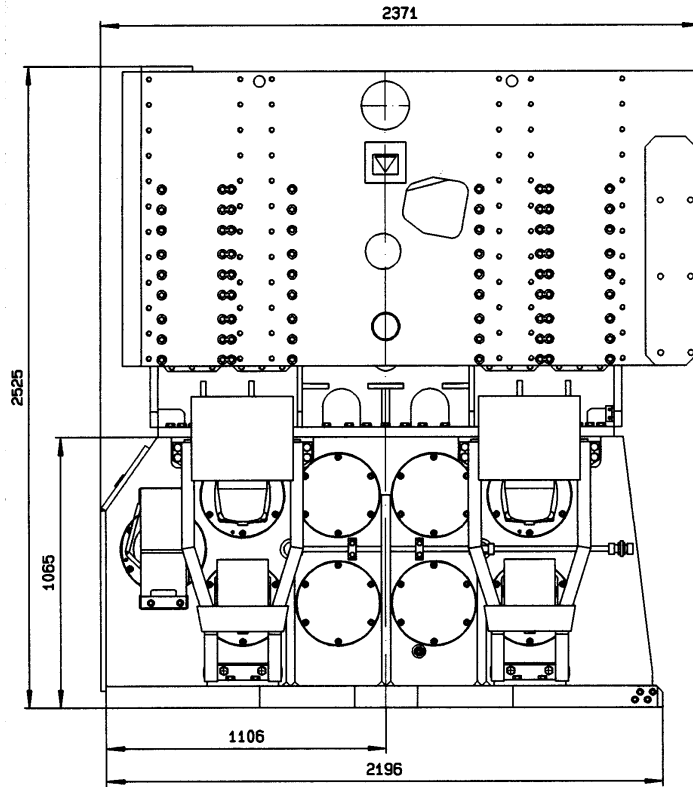

TECHNISCHE DATEN:

Fliehkraft max.
 Stat. Moment max.
 Schwingungsfrequenz max.
 Zugkraft max.
 Gewicht *
 Gewicht (dynamisch) *
 Schluckvolumen max.
 Betriebsdruck max.

TECHNICAL DATA:

centrifugal force max.
 eccentric moment max.
 oscillation frequency max.
 pulling force max.
 weight *
 weight (dynamic) *
 volume input max.
 working pressure max.

			(Option)
[kN]	2998	1919	
[kgm]	0-62	0-62	
[Hz]	35	28	
[kN]	600	600	
[kg]	11000	10900	
[kg]	6700	6620	
[l/min]	1260	739	
[bar]	350	350	

* ohne Spannzange

* without clamping device

Zentralumlaufschmierung der Hauptlager mit Ölkühlung.
 Centreliced force-feed lubrication to the main bearings with cooling.

Subject to Technical modifications

Distributed in Australia & New Zealand by ThyssenKrupp Steelcom A company of ThyssenKrupp Services		
PO Box 840 North Sydney NSW 2059 Australia T: +61 2 9954 9166 Sales +61 2 4966 0688 F: +61 2 9955 4298 enquiries@steelcom.com.au www.steelcom.com.au	PO Box 51254 Pakuranga Auckland 2140 New Zealand T: +64 9 576 3977 F: +64 9 576 3978 afenn@steelcomnz.co.nz www.steelcomnz.co.nz	